




1. If you have this type of filter housing where there is a large clamp holding the filter in place – you have a “151 Filter”. Please follow these steps for replacement. Bracket may be different.



2. If there is a bracket attached – make note of the position of this bracket with respect to the Eventuri Badge. **Take a photo for easy reference.** You will need to reinstall the bracket and the clamp in the same position.

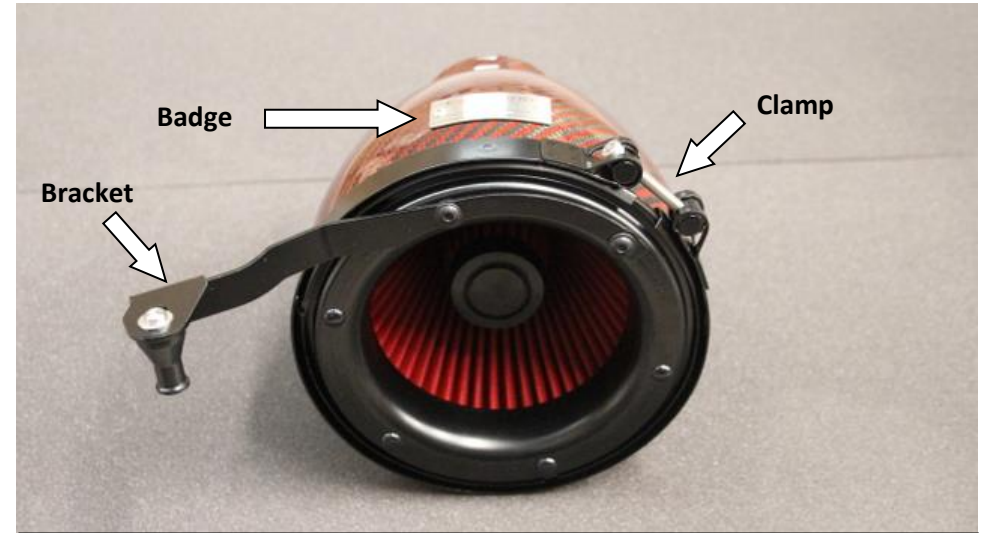

3. Loosen the quick release clamp and remove.



4. Remove the cowl – which is attached to the filter. You will also see the rubber gasket – it may be attached to the bottom of the cowl.



5. Remove the filter from the cowl by loosening the filter clamp as shown.



6. With the clamp loosened you can pull the cowl off the filter. It may require a little force.



7. Now push the cowl back into the new filter. **Push the cowl down fully** and tighten the clamp around the filter – **apply downwards pressure on the cowl while you tighten.**



8. Ensure the clamp is at the base of the filter neck – if not, slightly loosen and pull it down, then tighten.



9. Place the rubber gasket on the carbon housing edge.



10. Insert the filter assembly back into the carbon housing – be careful not to catch the gasket as you push it down. Ensure gasket is even all around. **Now rotate the bracket to the SAME position as it was originally.**



11. Place the clamp back around the cowl – **position clamp to the same position as originally** and tighten

12. Filter change is now complete.

The recommended cleaning interval for optimum performance is 5000Km. Filters can be cleaned with compressed air or with a cleaning kit available from your dealer.